

In-Line Polarized Device

Feature

Low insertion loss
High return loss
High extinction ratio
High reliability & stability

Application


Communication system
Test Instrumentation
Fiber sensor system

● Performance Specifications

Parameter	Unit	Value
Centre Wavelength	nm	1310、1480or 1550
Operating Wavelength	nm	CW±20
Insertion Loss	dB	≤0.6
Min.Extinction Ratio @23°C	dB	≥25
Typ.Extinction Ratio@23°C	dB	≥28
Return loss	dB	≥55
Power handling	mW	≤500
Fiber Type	/	PM Panda fibre
Operating temperature	°C	-25~ +85
Storage temperature	°C	-40 ~ +85

Remark: 1. The reliability test conformed the Telcordia GR-1221-CORE.
2. Specifications exclude connector.

● Package drawing

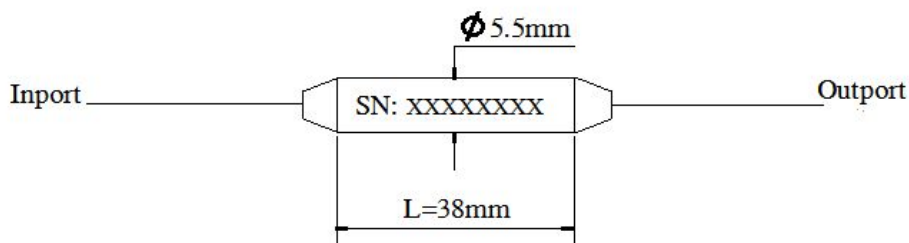

● Contact Information

Website: www.d-colortel.com
sales@d-colortel.com